

Energy Efficient

Baptismal Heater

Baptismal




Model No.	Watts	Volts	Amps	ON	OFF	Tolerance	DIMENSIONS (inch/mm)	
							Overall Length	Dia
BPH10-120V	1000	120	8.3	80 °F	105 °F	± 8°	33/838	2 3/4 - 70



Model No.	Watts	Volts	Amps	ON	OFF	Tolerance	DIMENSIONS (inch/mm)	
							Overall Length	Dia
BPH20-120V	2000	120	16.6	80 °F	105 °F	± 8°	33/838	4 1/8 - 70

- Just place in pool 24hrs prior to ceremony.
- Built in GFCI
- Built in Thermostat

CAUTION • CAUTION • CAUTION
Remove before church baptismal ceremony.

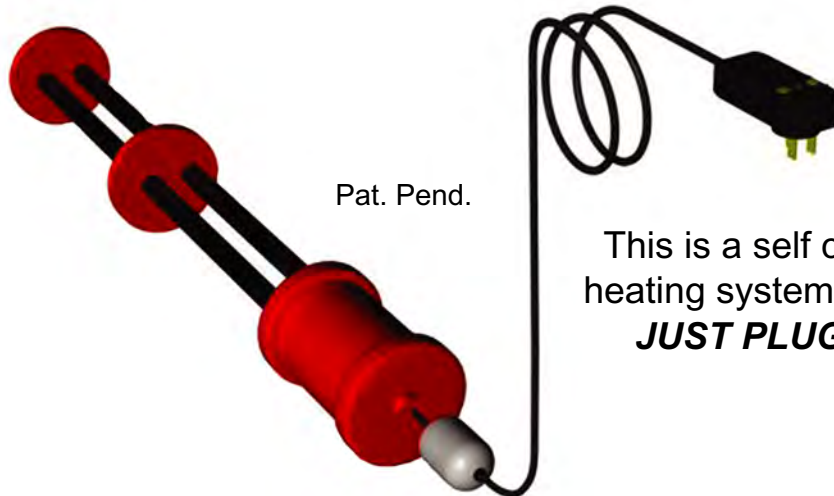

This is a self contained heating system with GFCI
JUST PLUG IT IN!

1 KW Heater recommended for 100 gallons
2 KW Heater recommended for 200 gallons

Energy Efficient



Pat. Pend



Titanium Heat Exchanger

Pat. Pend



Pat. Pend

Heat Exchanger



Heat Exchanger

Heat Exchanger

Titanium Model No.	Watts	Volts	Amps	A Length	DIMENSIONS (inch/mm)	
					B Length	
IHC-TY6-2	6000	240	25 Single phase - 15 Three phase	11" - 280	8" x 8"	204 x 204

PTC ENERGY EFFICIENT TECHNOLOGY

- 100% Titanium Exchanger
- All metal durable housing
- 50 PSI Max.
- Corrosion resistant
- Replace heaters with out disconnecting plumbing
- Will not burn out on no flow condition
- Built in thermal protection
- "J" Thermocouple sensor in titanium housing
- Digital temperature control ± 1 accuracy (± 0.25 optional model 16C)
- Field selectable temperature setting $^{\circ}\text{C}$ or $^{\circ}\text{F}$
- 6000 Watt and 12000 Watt can be wired single phase or 3 phase.
- 1 1/2" Inlet and Outlet NPT.
- Built in GFCI.

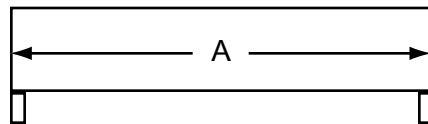

GFCI



Pat. Pend